



ISOLNOISE AE 8

THE HIGH DENSITY ELASTIC-RESILIENT PANEL MADE OF VULCANISED AND PRESSED RUBBER GRANULES

Ecological membrane for foot traffic noises acoustic insulation made with a 750 kg/m^3 density mat made up of natural and synthetic elastomers compounds, coming from the recycling of ELT (end of life tyres), bound by mass polymerized polyurethanes.

ACOUSTIC PERFORMANCES


DESCRIPTION	SYMBOL	M.U.	VALUE	NORMS	NOTES
Apparent dynamic rigidity	(s')	MN/m ³	40	UNI EN 29052-1	Internal laboratory value
Resonance frequency	(f_0)	Hz	71	UNI EN 29052-1	Internal laboratory value
Impact sound noise attenuation level	ΔL_w	dB	25	UNI EN 12354-2	Screed weight 115

ATTENUATION RATING INDEX OF IMPACT SOUND PRESSURE LEVEL ACCORDING TO UNI EN 12354-2

m ²	60	65	70	75	80	85	90	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185	190	195	200	
kg/m ²	60	65	70	75	80	85	90	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185	190	195	200	
ΔL_w	20,6	21,2	21,6	22,1	22,5	22,9	23,3	23,6	24,0	24,3	24,6	24,9	25,2	25,4	25,7	25,9	26,2	26,4	26,6	26,8	27,0	27,2	27,4	27,6	27,6	28,0	28,2	28,3	28,5	
dB																														

m' = Lodging screed weight

ΔL_w VARIATION IN RELATION TO SCREED WEIGHT

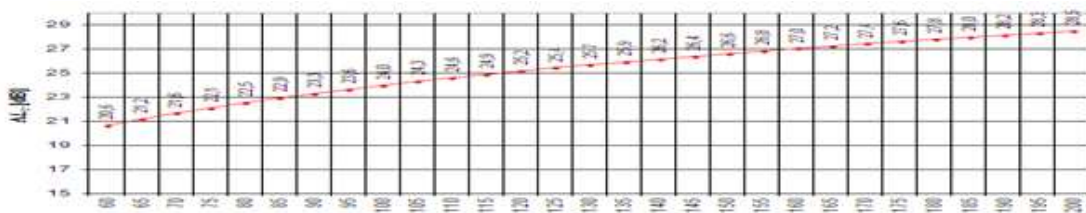

Screed surface mass m' (kg/m²)

THERMAL PERFORMANCES

DESCRIPTION	SYMBOL	M.U.	VALUE	NORMS	NOTES
Thermal conductivity	(λ)	W/mK	0,1226	UNI EN 12667:2002	Cert.n° 078-09-the TR
Thermal resistance	(R)	m ² K/W	0,065	UNI EN 12667:2002	Calculated Value
Thermal transmittance	(U)	W/m ² K	15,384	UNI EN 12667:2002	Calculated Value

**PHYSICAL-MECHANICAL PERFORMANCES**

DESCRIPTION	M.U.	VALUE	TOLERANCES
Rubber density	Kg/m ³	750	± 7 %
Rubber thickness	mm	8	± 10 %

DESCRIPTION	M.U.	VALUE	NORMS
Elongation percentage at break	%	27	
Heat resistance	°C	Up to + 80	
Cold resistance	°C	Up to -30	
Fire rating		B2	DIN 4102
SHORE A hardness		50	

CHEMICAL PERFORMANCES

CHARACTERISTIC	PERFORMANCES
Chemical interactions	Highly resistant to acids and alkaline detergents, retains its characteristics unchanged over time
Electrostatic	Does not accumulate static charge and prevent interaction between materials
Environmental sustainability	100 % recyclable

SPECIFICATION

Impact sound noises acoustic insulation obtained by carrying out a floating floor over a suitable de-coupling layer in elastic-resilient material laid directly on the concrete floor or after having made the levelling light screed. The material is made of a 750 kg/m³ (± 7%) density mat made up of natural and synthetic elastomeric compounds coming from the recycling of ELT (end of life tyres), bound by mass polymerized polyurethane. 5.0 mm thickness, with an attenuation rating index of impact sound noise pressure level of $\Delta L_w = 25$ dB, with a 115 kg/m² load, dynamic rigidity equal to 40 MN/m³ and a resonance frequency 82 Hz such as ISOLNOISE AE 8 by VALLI ZABBAN.




SINCE 1928

Valli Zabban


RUBBER TECHNOLOGIES



APPLICATION - FLOOR

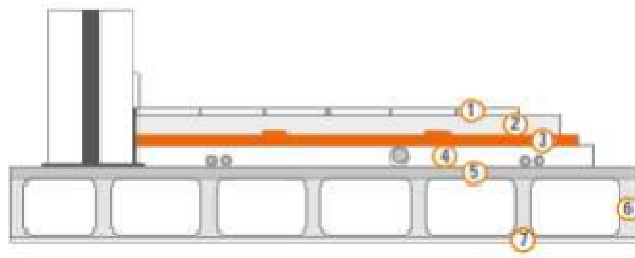

- 1) Finishing
- 2) Lodging screed
- 3) ISOLNOISE AE
- 4) Lightened trimming screed
- 5) Concrete layer
- 6) Floor
- 7) Plaster

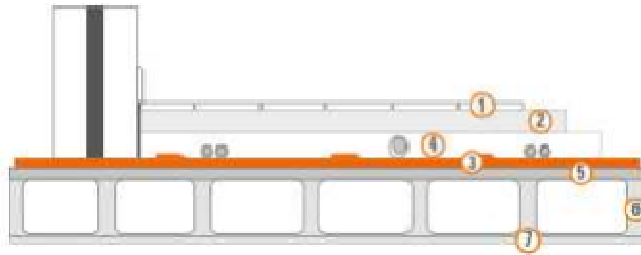

- 1) Finishing
- 2) Lodging screed
- 3) ISOLNOISE AE
- 4) Lightened trimming screed
- 5) Concrete layer
- 6) Floor
- 7) Plaster

After having installed the fixtures and the levelling with lightened screed, before the lodging screed, or directly on the concrete floor before the lightened screed.

APPLICATION METHOD (AFTER LIGHTENED SCREED - 1° IMAGE)

1. Decouple at the base all the vertical partitions (walls) with ISOLBAEND cut wall band.
2. Decouple the lightened screed from the walls with AEFLEX band.
3. Lay the acoustic insulation ISOLNOISE AE 8 over the lightened screed and all over the floor getting as near as possible
4. Carry out the complete decoupling of the floating screed from the external vertical partitions applying the AEFLEX adhesive band between ISOLNOISE AE 8 and the wall making all the overlaps.

APPLICATION METHOD (BEFORE THE LIGHTENED SCREED - 2° IMAGE)

1. Over the unrefined floor, after having built the external walls, before the internal walls, lay the ISOLNOISE AE 8 acoustic insulation on the entire floor.
2. Seal the junctions between the mats by overlapping the selvages of the rolls margins and tape with suitable tape.
3. Carry out the internal vertical partitions (internal walls) directly on the elastic panel.
4. Carry out the plumbing and wiring systems directly on the elastic panel.
5. Carry out the complete decoupling of the external vertical partitions by overlaps with ISOLBAEND V band.

DIMENSION AND PACKAGING

SIZE	M.U.	VALUE
Thickness	mm	8
Roll height	m	1
Roll length	m	6
Weight per m ²	Kg/m ²	6
Number of rolls per pallet	Piece	16
Total area per pallet	m ²	96
Pallet dimension	cm	100x120x100+10 cm

Rev. 4 - 10/20



Valli Zabban S.p.A. • Società Unipersonale • Share Capital € 5.000.000 i.v.
Head Office

50041 Calenzano (FI) Italy, via di Le Prata, 103 • tel. +39.055.328041 • fax +39.055.300300
www.vallizabban.com • info@vallizabban.it • vallizabban@pec.it
C.C.I.A.A. Florence N. 05476750483 • R.E.A. FI 549826 • VAT IT 05476750483

